


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.11V I:0.1770A P:37.127W PF:0.9721 Freq:49.99Hz Lamp Flux:4513.81x1 lm

NAME: GLM-SPL6060-36W(120LMW)	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP			PHOTOMETRIC DATA			Eff: 121.58 lm/W
MODEL			Imax (cd)	2135	S/MH (C0/180)	1.30
NOMINAL POWER (W)			LOR (%)	100.0	S/MH (C90/270)	1.16
RATED VOLTAGE (V)	220.0		TOTAL FLUX (lm)	4513.8	□ UP, DN (C0-180)	0.0, 50.0
NOMINAL FLUX (lm)	4513.81		CIE CLASS	DIRECT	□ UP, DN (C180-360)	0.0, 50.0
LAMPS INSIDE	1		□ up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	220		□ down (%)	100.0	CIBSE SHR MAX	1.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

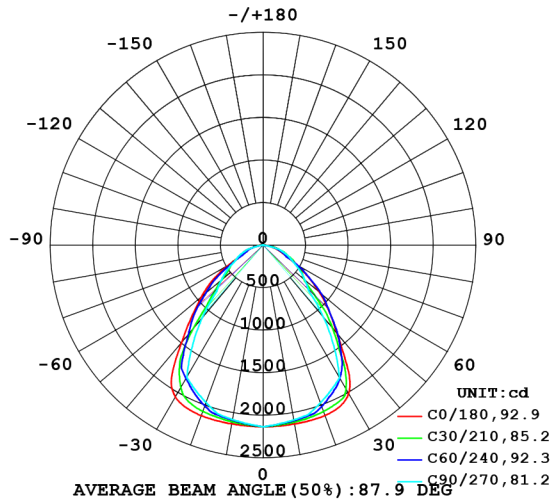

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

